

DUMA 杜马

POWER 系列

全自动智能模板机

Automatic intelligent template machine

1969T-2850



匠心制作, 所以精致

Crafty, so exquisite

1969T-2850基本配置

缝制范围:
(X)28;(Y)50cm

FRID识别

吸风装置

操作面板

缝台尺寸:
114x133x83cm

控制开关






■ RFID自动识别

RFID automatic identification

采用射频信号识别技术，识别准确率高，最多可识别999个不同模板信息，单程序高达80000针。

Using radio frequency signal recognition technology can improve identification accuracy and up to 999 different template information can be identified. Single procedure up to 80,000 stitches.

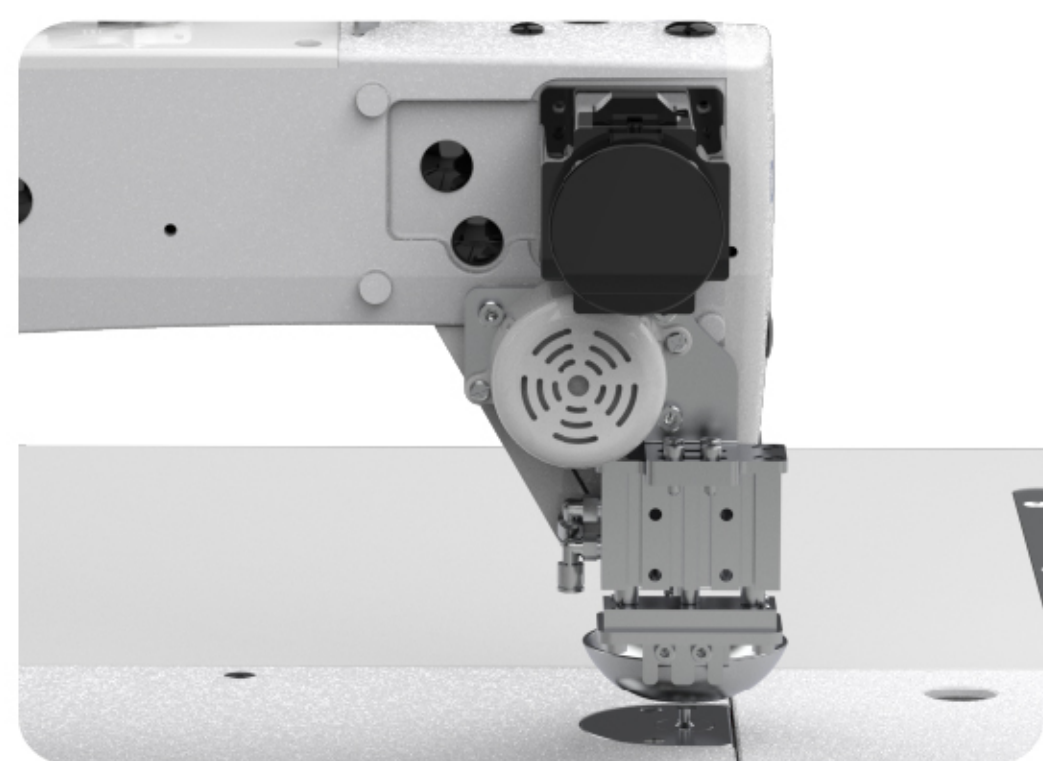


■ 智能中压脚

Intelligent medium pressure foot

可以在缝纫过程中，无阶段变更中段压脚下死点高度，特别是对布层缝纫等有效。中段压脚准确压紧缝纫物，以此防止跳线和断线等故障的发生。

The height of the dead point of the middle pressing foot can be changed without stage, especially effective for cloth sewing. The middle press foot accurately presses the sewing material to prevent faults such as jumpers and broken threads.

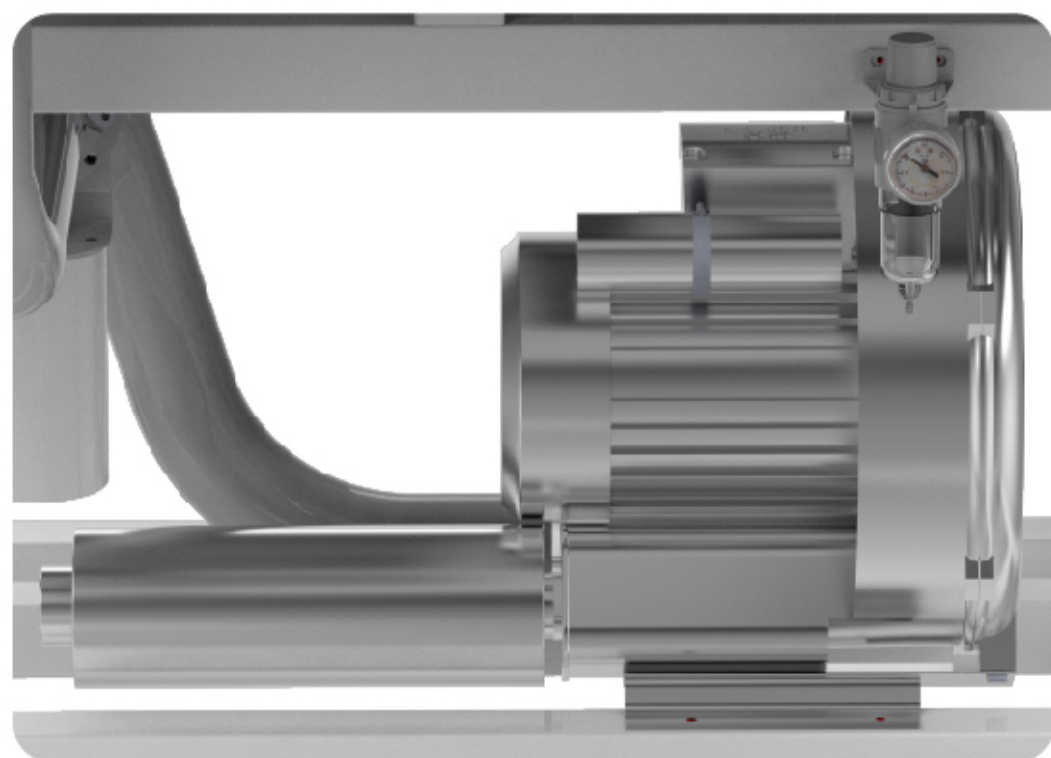


■ 吸风装置

Suction device

对应缝制柔软的针织面料或轻薄面料时的摆放机架下端装载吸风装置。

Corresponding to the sewing of soft knitted fabrics or lightweight fabrics, the lower end of the rack is loaded with air suction device.

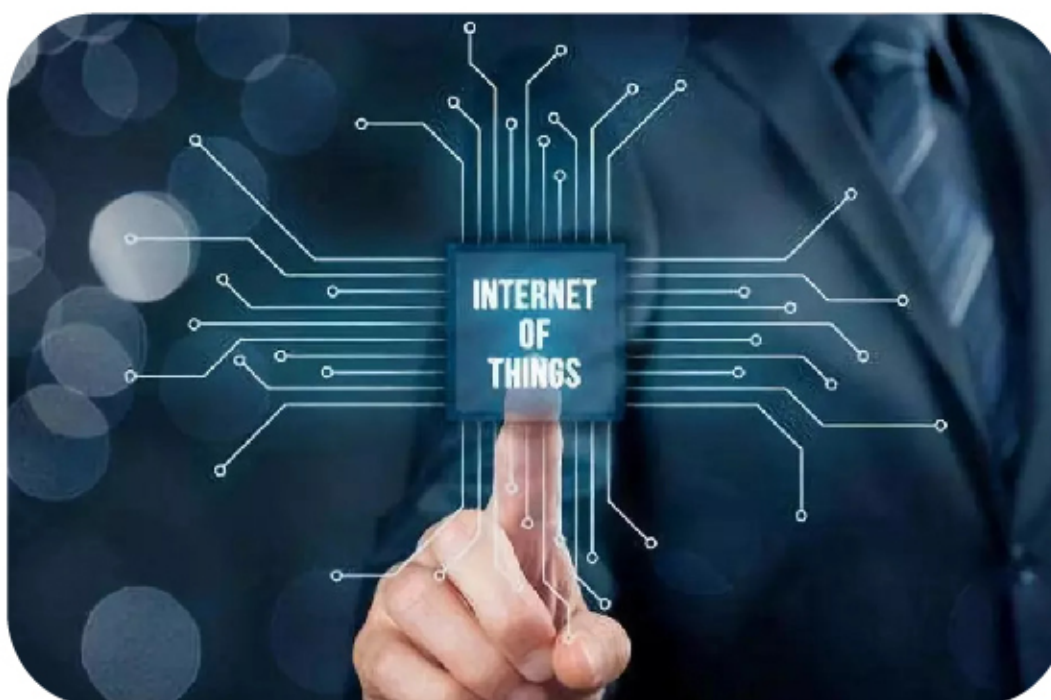

■ 远程物联网

Remote Internet of Things

电脑遥控实现模块花样储存共享输入，软件在线升级，可远程批量管理花样及设备维护，大幅提升生产效率。

Achieve pattern input storage sharing, software online upgrade, remote batch management patterns and equipment maintenance, improve production efficiency.



■ 面板操作屏

Operating panel

智能触控式，支持U盘数据传输、读取、储存，真人语音功能，界面采用图形/文字设计，轻松多种功能。

Intelligent touch type, support U disk data transmission\read \storage, real voice function, use graphics/text design, easy to achieve multiple functions .

■ 底线检测省线省布

The bottom line detection saves the line and the cloth

提前检测梭芯线余量不足，提示客户更换梭芯。


Detect the lack of shuttle core in advance and prompt the customer to replace the shuttle core.

★ 双动刀回旋切刀&1.6倍旋梭

Double acting rotary cutter&1.6 times the spinning shuttle

步进电机控制，双动刀剪线装置，声音轻，剪线稳，线头控制在3MM以内。

Stepper motor control, Double round knife thread cutting device, thus make the thread after cut within 3mm, accurate & light voice

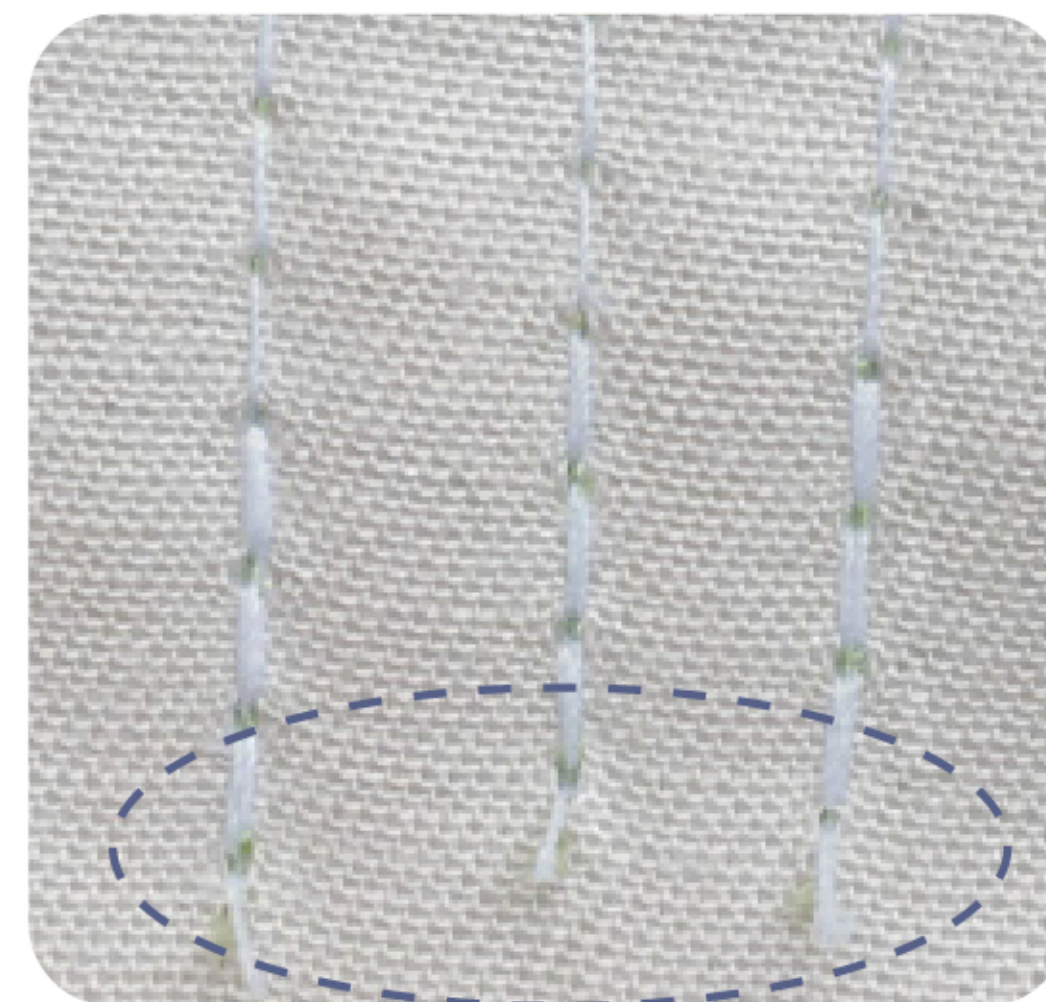

● 缝台尺寸：114x133x83cm；

● 缝制范围：28 (X) cm, 50 (Y) cm；

● 中压脚上升量：10mm ；

● 中段压脚冲程：3mm

● 送料距：0-5mm；

● 缝纫速度：最高3500r.p.m；

● 机针：DPx5 (#7-#24) ; DPx17 (#11-#24) ；

● 空气规格：0.25-0.4MPa (最大0.5MPa) ；

● 主轴马达：Ac 伺服马达220v 550W ；

● 吸风装置：标配；

● 供油方式：头部无油；

● 程序输入装置：电脑USB数据线或U盘





● 模板识别功能：RFID

● 切线方式：双刀回旋式，步进控制



全自动智能模板机，小机型、大用途，占地少、功能多、好移动，解决产业用工与技能缺陷问题，特别适合服装流水线上的智能精益缝制！

Automatic intelligent template machine, small models, large use, less area occupation, more functions, good mobility, can solve the problem of industrial employment and skills defects, especially suitable for sewing on the clothing assembly line.

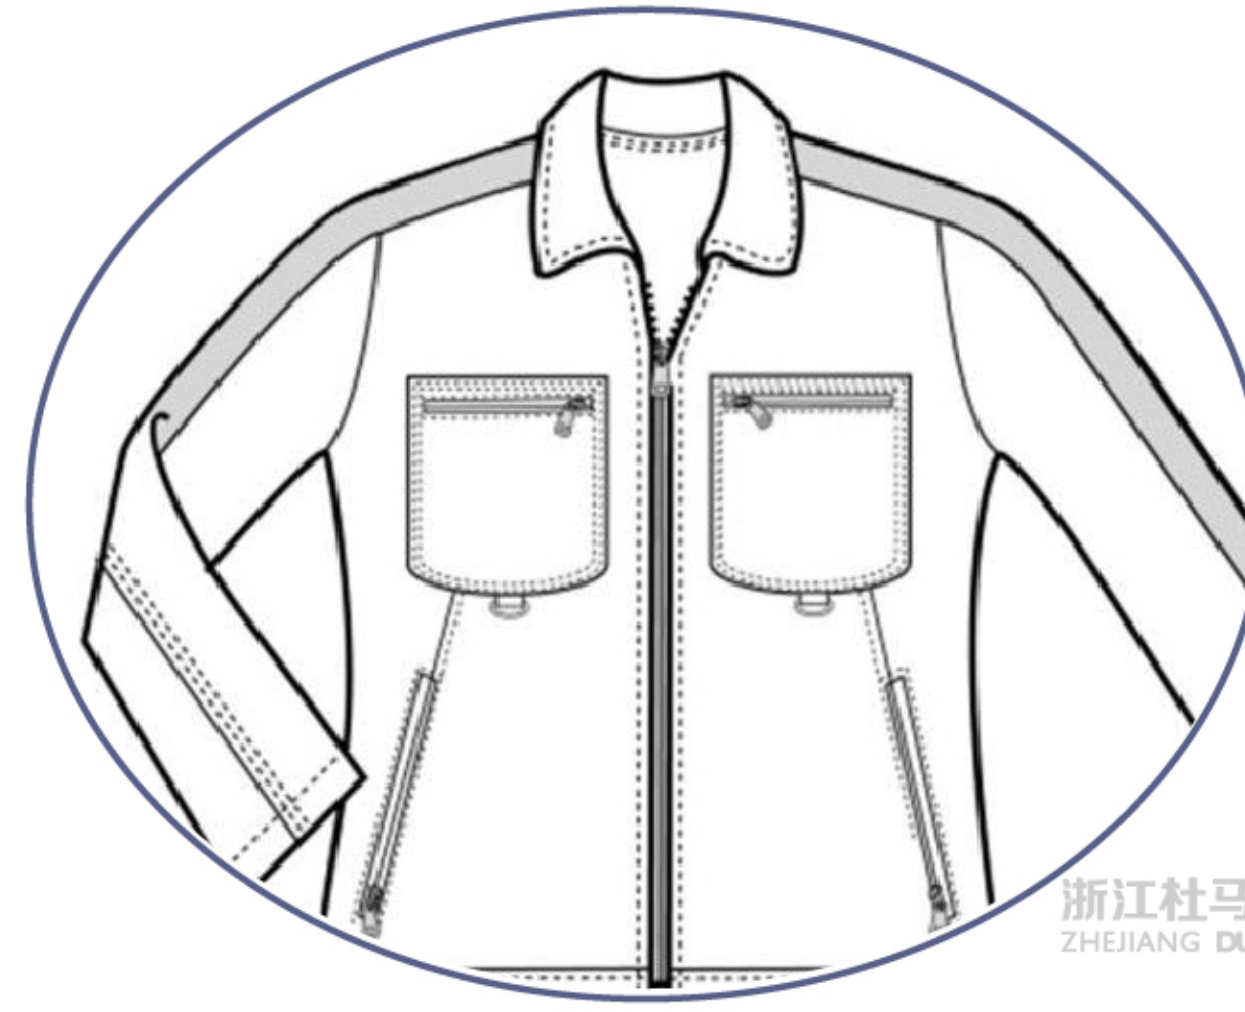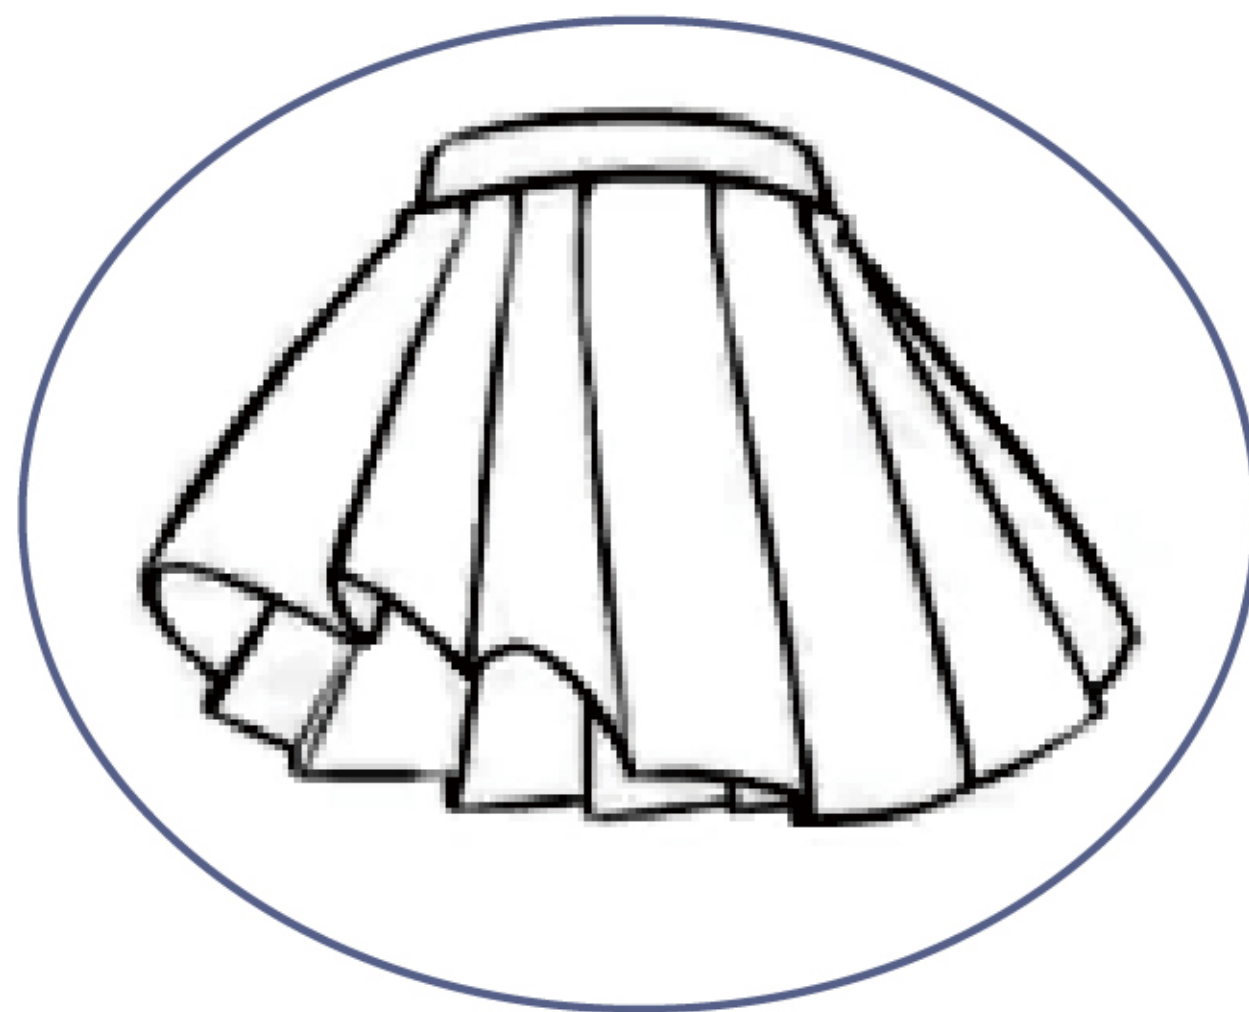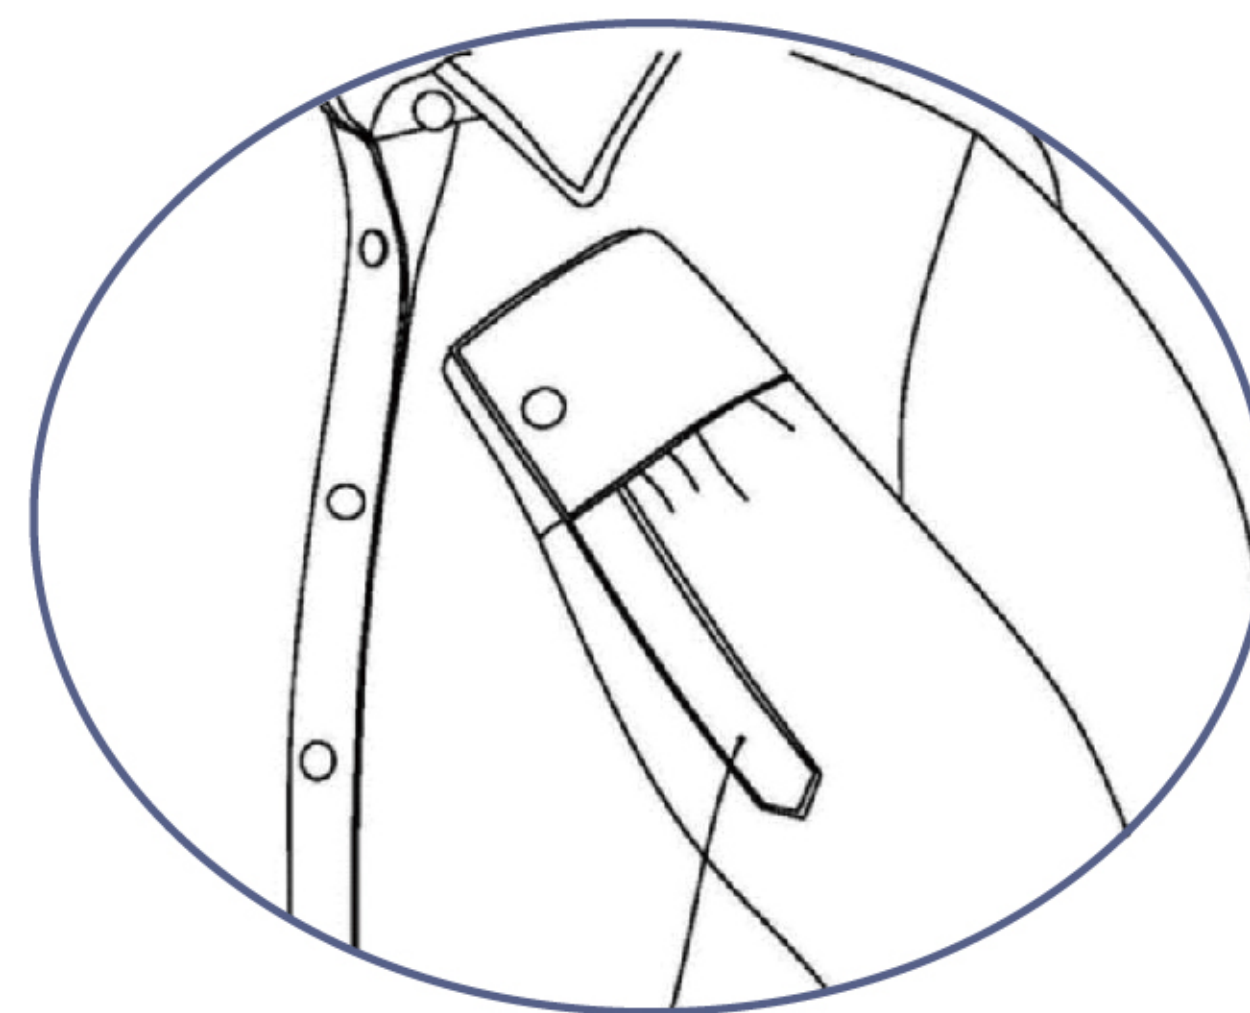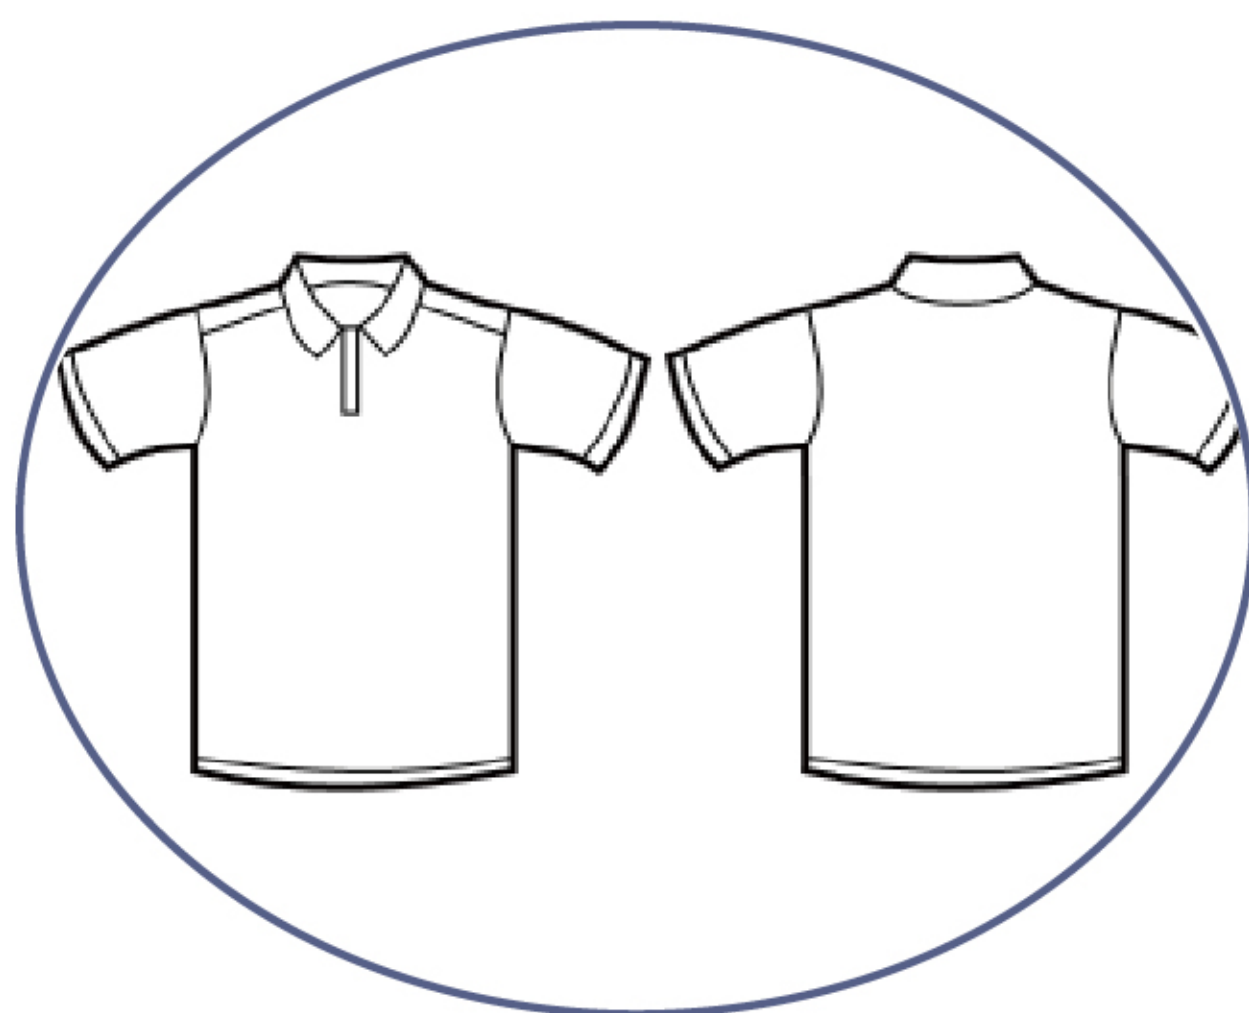

NEW SERIES FULL OF POWER

Inspired and unique design appearance
with excellent practical performance.



国货必须
自强



浙江省台州市椒江区机场南路58号
No. 58, Airport South Road, Jiaojiang District,
Taizhou City, Zhejiang Province



电话/Tel: +86-576-89086976/86
传真/Fax: +86-576-89086979



网络/Web: www.cnduma.com
E-mail: sales@cnduma.com